


Copper Foil Tape W/O Conductive Adhesive

NKS-NA/CA### Series

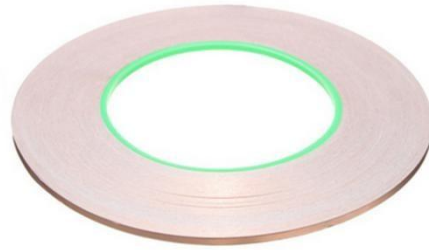

Product Description:

- * The tape consisting a copper foil backing coated with conductive acrylic pressure sensitive adhesive


Product Feature:

- * Heat preservation, heat insulation
- * Waterproof, cold and heat resistance
- * Strong adhesion and easily peeled off
- * EMI shielding
- * UV resistance, flame retardant
- * Moisture resistance, chemical and corrosion resistance
- * Ideal for outdoor application and durable

Application:

- * Single conductive and double conductive
- * Eliminate the effect of EMI
- * Avoid unnecessary current and voltage
- * Ideal for transformer, mobile phone, computer, PDA, PDP, and LCD monitor, PC, copier etc.
- * Self adhesive copper foil tape used in fridge, air conditioner, automotive, bridge, hotel, electronic industry etc.
- *

Construction:

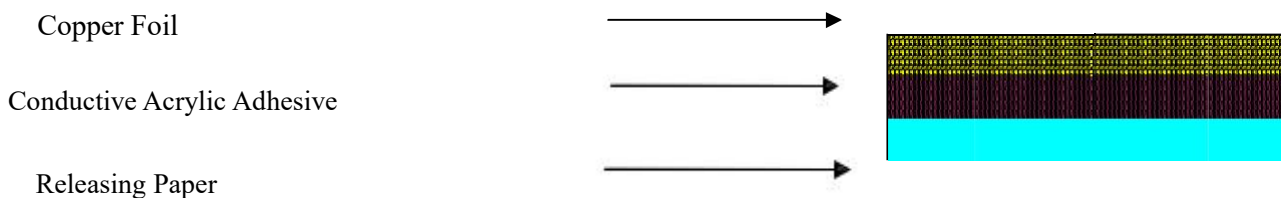

Properties:

Item	NKS-NA/CA050	NKS-NA/CA060	NKS-NA/CA050	NKS-NA/CA090
Color	Copper	Copper	Copper	Copper
Carrier	Copper Foil	Copper Foil	Copper Foil	Copper Foil
Adhesive	W/O Conductive PSA	W/O Conductive PSA	W/O Conductive PSA	W/O Conductive PSA
Backing Thickness(mm)	0.018	0.025	0.035	0.050
Total Thickness (backing plus adhesive, mm)	0.05±0.005	0.06 ±0.005	0.07 ±0.005	0.085 ±0.01
Appearance	Excellent, No oxidation	Excellent, No oxidation	Excellent, No oxidation	Excellent, No oxidation
Electrical Resistance through Adhesive(ohm/in ²)	<0.05	<0.05	<0.05	<0.05
Holding Power(min/inch)	≥1440	≥1440	≥1440	≥1440
Adhesion to Steel (N/25mm)	>10	>10	>10	>10
Application Temperature	-20~120℃	-20~120℃	-20~120℃	-20~120℃
Storage Condition	20℃,65% RH	20℃,65% RH	20℃,65% RH	20℃,65% RH
Breaking Strength(lb./in)	27	27	27	27
Flame Retardancy	Pass	Pass	Pass	Pass

Notice: The above technical information and data should be considered representative or typical only and should not be used.

Storage Conditions:

As of the date of the product to the factory, avoid direct sunlight and low temperature (0 °C), high temperature (below 40 °C), placed under the environment of high humidity (60% RH), can be stored for 12 months;

Notice:

All physical properties, statements, and recommendations are based either on tests we believe to be reliable or our experience, but they are not guaranteed. Naikos recommends each user determine the suitability of the product for the intended purpose.

Warranty and Limited Remedy:

THE FOLLOWING WARRANTY IS MADE IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE.

Naikos warrants its tape will be free from defects in material and manufacturer. If a tape is proved to be defective, then the exclusive remedy, and Naikos' and seller's sole obligation shall be, at Naikos' option, to replace the quantity of the tape which is proved to be defective or to refund the purchase price.

Limitations of Liability:

Except where prohibited by law, Naikos will not be liable for any loss or damage arising from the Naikos' product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

The forgoing Warranty and Limited Remedy and Limitation of Liability may be changed only by a written agreement signed by authorized officers of Naikos and seller.

NAIKOS(XIAMEN) ADHESIVE TAPE CO.,LTD

Tel: +86-592-7152818

Fax: +86-592-7152858

Email: info@xmns.com

Web: www.xmns.com / www.nkstape.com

Add: No.48, Huli Industrial Park, Meixi Street, Tong'an District, Xiamen City, Fujian, China